

Teledyne RESON

Hydrophone TC4033

Robust Spherical Reference Hydrophone



The TC4033 provides uniform omnidirectional characteristics within the full frequency range of 1Hz to 140kHz.

The Typical sensitivity of -203dB re 1V/μPa and the capacitance of 7nF, ensure an excellent signal to noise ratio, thereby allowing TC4033 to be used with extension cables with only a limited reduction in sensitivity.

The TC4033 offers excellent acoustic characteristics and durability, which makes it ideal for a wide range of applications and for calibration purposes.

NBR means Nitrile Rubber

The NBR rubber is first of all resistant to sea and fresh water but also resistant to oil. It is limited resistant to petrol, limited resistant to most acids and will be destroyed by base, strong acids, halogenated hydrocarbons (carbon tetrachloride, trichloroethylene), nitro hydrocarbons (nitrobenzene, aniline), phosphate ester hydraulic fluids, Ketones (MEK, acetone), Ozone and automotive brake fluid.

TECHNICAL SPECIFICATIONS

Usable Frequency range:	1Hz to 140kHz
Linear Frequency range:	1Hz to 80kHz
Receiving Sensitivity:	-203dB ±2dB re 1V/μPa at 250Hz
Transmitting Sensitivity:	144dB ±2dB re 1μPa/V at 1m at 100kHz
Directivity, Horizontal:	Omnidirectional ±2dB at 100kHz
Vertical Directivity:	270°±2dB at 100kHz
Nominal Capacitance:	7,8 nF (incl.10m cable)
Operating depth:	900m
Operating Temperature range:	-2°C to +80°C
Storage Temperature range:	-40°C to +80°C
Weight incl. 10m cable, (in air):	1.5kg
Cable (length and type):	Standard 10m shielded pair DSS-2/MIL-C-915. Optional cable length available on request
Connector type:	BNC
Encapsulating material:	Special formulated NBR
Metal body:	Aluminum bronze - AlCu10Ni5Fe4

PRODUCT BENEFITS

- Omnidirectional in the full frequency range
- Wide frequency range
- Durable construction
- Long term stability
- Individually calibrated



Hydrophone TC4033

Robust Spherical Reference Hydrophone

Documentation:

Individually calibration curves:

Sensitivity at ref.: frequencies:
250 kHz

Receiving sensitivity:
At 5 kHz to 200 kHz


Impedance:
5 kHz to 200kHz

Horizontal directivity:
At 100 kHz


Vertical directivity:
At 100 kHz

Transmitting sensitivity:
5 kHz to 200 kHz


Horizontal directivity pattern

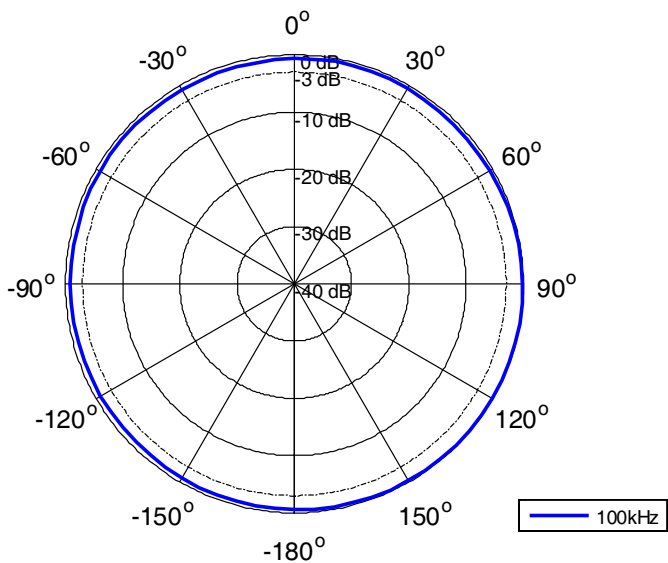


Receiving Sensitivity [dB re 1V/μPa @ 1m]

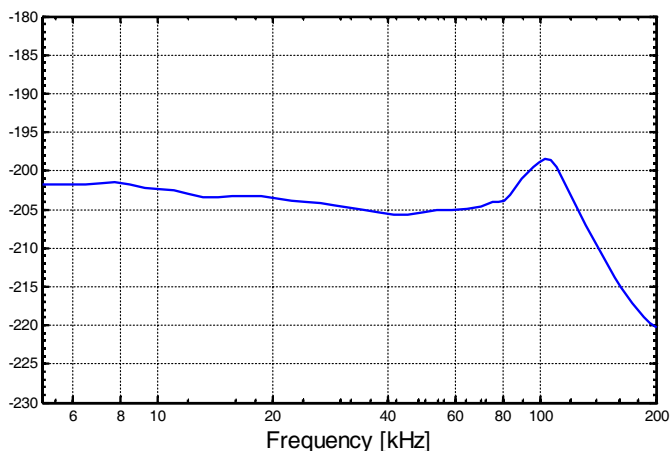

Transmitting Sensitivity [dB re 1μPa/V @ 1m]

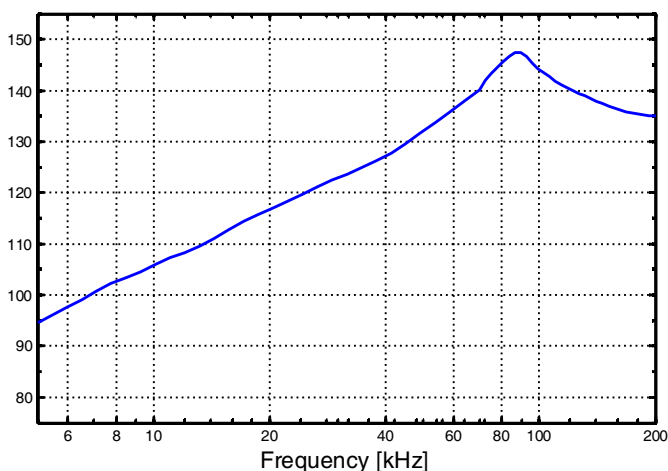

Impedance

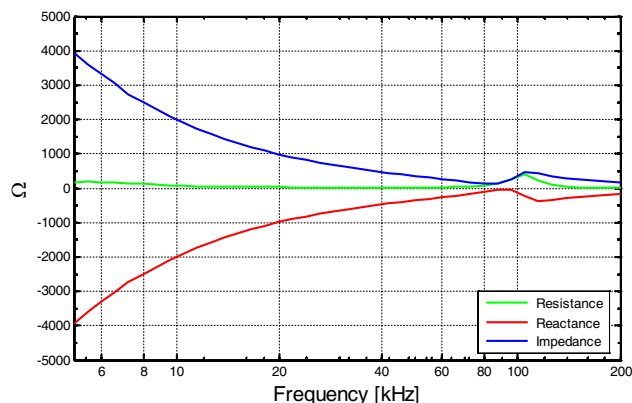



Hydrophone TC4033

Robust Spherical Reference Hydrophone

Documentation:

The sensor element is permanently encapsulated in Special formulated NBR, which has been especially compounded to ensure acoustic impedance close to that of water and low water permeability.

Electrical Diagram and Outline Dimensions

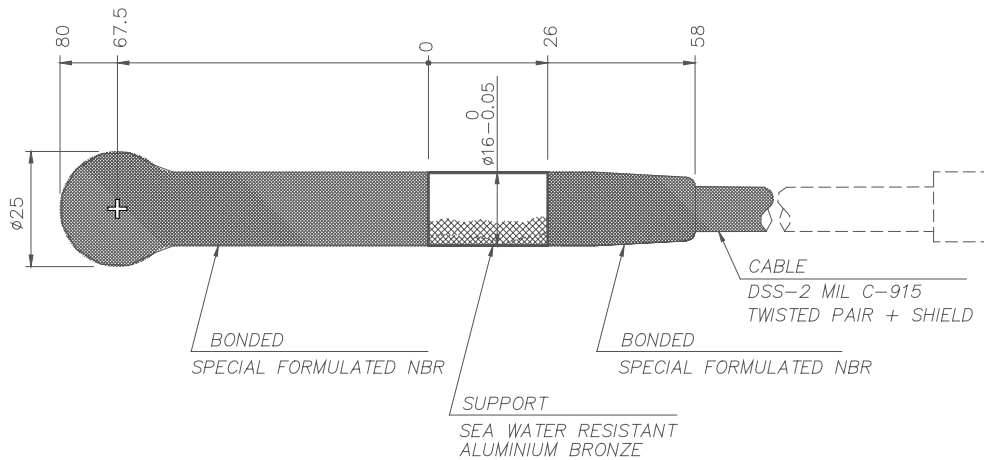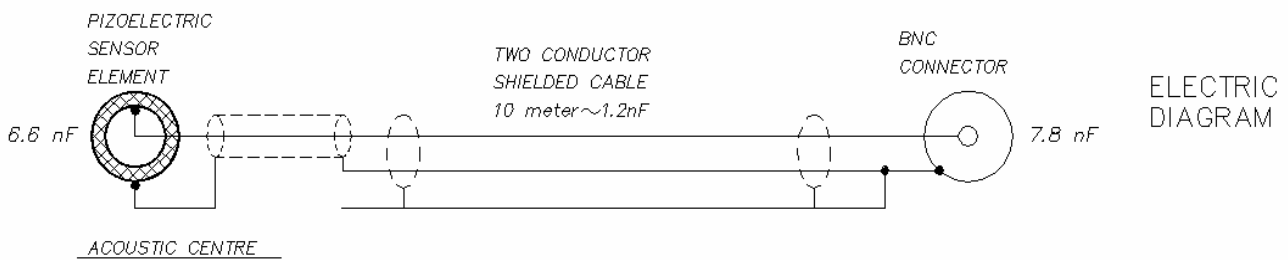

For more details visit www.teledyne-reson.com or contact your local Teledyne RESON Office. Teledyne RESON reserves the right to change specifications without notice. 2016@Teledyne RESON

Teledyne RESON A/S Denmark Tel: +45 4738 0022 info@teledyne-reson.com	Teledyne RESON Inc. U.S.A. Tel: +1 805 964-6260 sales@teledyne-reson.com	Teledyne RESON U.K. Ltd. Scotland U.K. Tel: +44 1224 709 900 sales@reson.co.uk	Teledyne RESON B.V. The Netherlands Tel: +31 (0) 10 245 1500 info@reson.nl	Teledyne RESON GmbH Germany Tel: +49 421 3770 9600 info@teledyne-reson.com	Teledyne RESON Shanghai Office Shanghai Tel: +86 21 6110 8320 shanghai@teledyne-reson.com
---	--	--	--	--	---