

Teledyne RESON

Hydrophone TC4037

Spherical Reference Hydrophone



The TC4037 hydrophone sensor module provides a differential balanced output signal. It has been designed especially for operation with a differential preamplifier.

The use of differential sensor signals offers advantages such as, limitation of DC offset and fluctuation. It further adds 6dB more sensor sensitivity, reduces noise distortion and makes the sensor less sensitive to vibration, temperature. The mounting support is equipped with sealing o-rings that allows for convenient waterproof mounting.

NBR means Nitrile Rubber

The NBR rubber is first of all resistant to sea and fresh water but also resistant to oil. It is limited resistant to petrol, limited resistant to most acids and will be destroyed by base, strong acids, halogenated hydrocarbons (carbon tetrachloride, trichloroethylene), nitro hydrocarbons (nitrobenzene, aniline), phosphate ester hydraulic fluids, Ketones (MEK, acetone), Ozone and automotive brake fluid.


Metal body: TC4037-2 Aluminium alloy Al Mg1Si – If installed on a metal housing it is important that the housing is made of a similar material.

TECHNICAL SPECIFICATIONS

Usable Frequency range:	1Hz to 100kHz
Linear Frequency Range:	1Hz to 50kHz \pm 3dB
Receiving Sensitivity nominal:	-193dB re 1V/ μ Pa at 250Hz (with differential pre-amp 0dB)
Directivity, Horizontal plane:	Omnidirectional \pm 2dB at 40kHz
Vertical plane:	270° \pm 3dB at 40kHz
Capacitance nominal:	2 x 4,5 nF
Leakage resistance:	\geq 1G ohm
Operating temperature range:	-2°C to +55°C (with preamplifier)
Storage temperature range:	-40°C to +80°C
Operating depth:	1500m
Survival depth:	2000m (4037-3 3500m)
Terminating wires:	3 x AWG 22, length 0.5m
Weight in air:	86g.
Encapsulating material:	Special formulated NBR
Metal body:	TC4037-2: Aluminum alloy Al Mg1Si TC4037-3: Promet 12 CuSn 12 Tin bronze

PRODUCT BENEFITS

- High receiving voltage sensitivity
- Differential signal output
- Wide useable frequency
- Long term stability
- Omnidirectional in all planes
- Resistant to high static pressure
- Individually calibrated

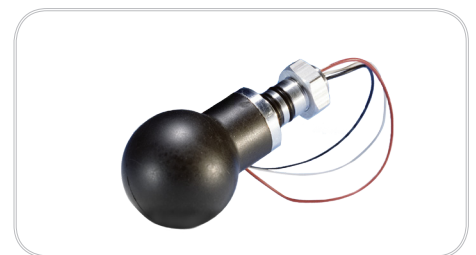

Hydrophone TC4037

Spherical Reference Hydrophone


Documentation:

Receiving sensitivity:
5 kHz to 100 kHz


Horizontal directivity:
20 kHz

Vertical directivity:
20 kHz


Receiving Sensitivity [dB re 1V/ μ Pa @ 1m]

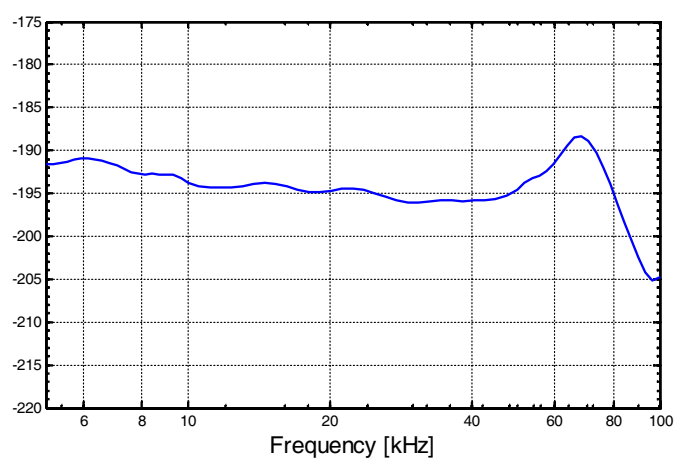

Horizontal directivity pattern

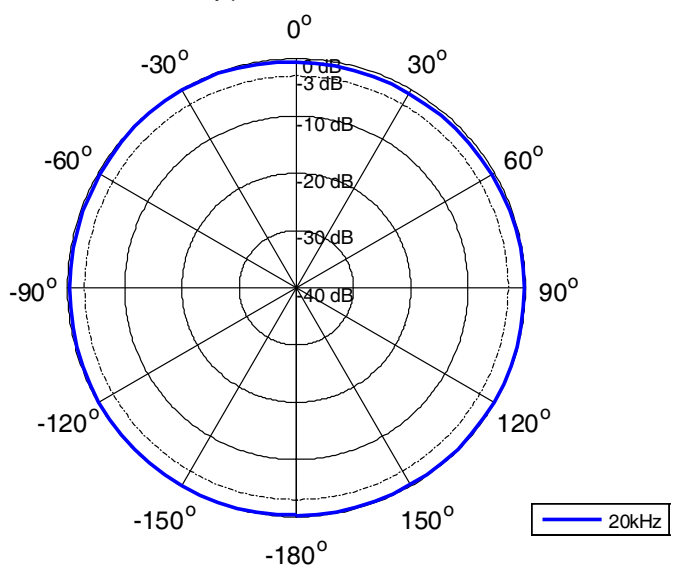

Vertical directivity pattern

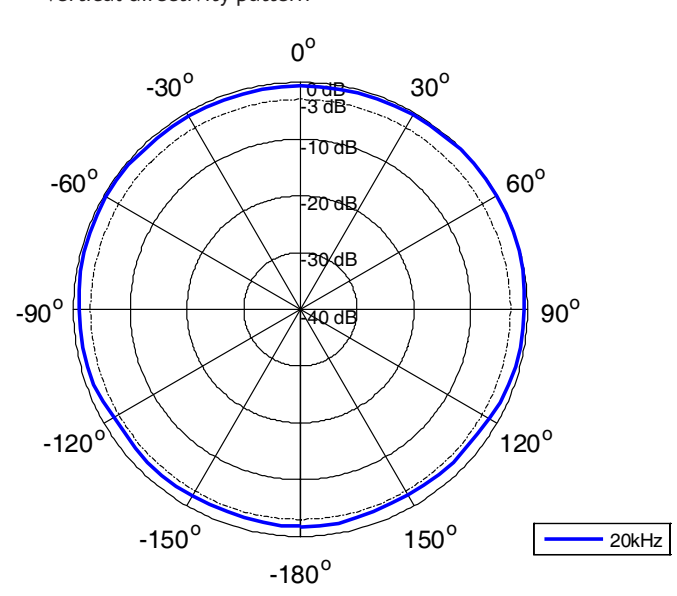


Hydrophone TC4037

Spherical Reference Hydrophone

Outline Dimensions TC4037-3

TC4037-3 has got metal body made of Promet 12 CuSn 12 Tin bronze.

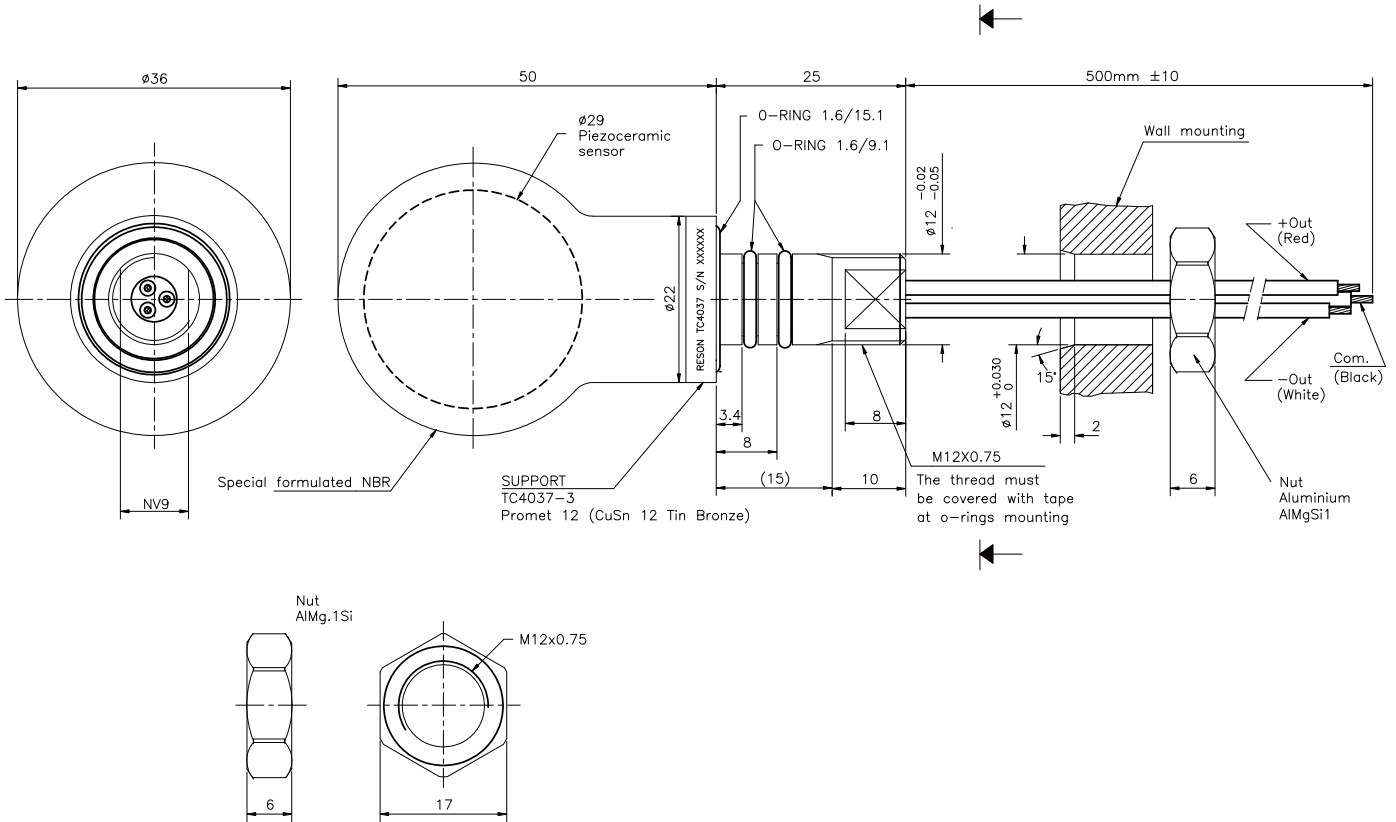

For information on export control regulations on this product, please refer to www.teledyne-reson.com



For more details visit www.teledyne-reson.com or contact your local Teledyne RESON Office. Teledyne RESON reserves the right to change specifications without notice. 2016@Teledyne RESON

Teledyne RESON A/S

Denmark
Tel: +45 4738 0022
info@teledyne-reson.com

Teledyne RESON Inc.

U.S.A.
Tel: +1 805 964-6260
sales@teledyne-reson.com

Teledyne RESON U.K. Ltd.

Scotland U.K.
Tel: +44 1224 709 900
sales@reson.co.uk

Teledyne RESON B.V.

The Netherlands
Tel: +31 (0) 10 245 1500
rbv-info@teledyne-reson.nl

Teledyne RESON GmbH

Germany
Tel: +49 421 3770 9600
info@teledyne-reson.com

Teledyne RESON Shanghai Office

Shanghai
Tel: +86 21 6110 8320
shanghai@teledyne-reson.com